










Bezeichnung		LED Down Light	Abmessungen
			mm
		<h2>10 Watt</h2>	
Artikel Nummer	Spezifikation		
IREG-NT-10W-PW	Power: 10W, Day white: 5500-6000K, 800 lumen, beam angle: 25, AC90-260V, Bridgelux Array		φ132×H88mm
IREG-NT-10W-NW	Power: 10W, Neutral white:4000-4500K, 750 lumen, beam angle: 25, AC90-260V, Bridgelux Array		φ132×H88mm
IREG-NT-10W-WW	Power: 10W, Warm white:2700-3500K, 700 lumen, beam angle: 25, AC90-260V, Bridgelux Array		φ132×H88mm
		<h2>20 Watt</h2>	
IREG-NT-20W-PW	Power: 20W, Day white: 5600K, 1600 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array		φ198×H122mm
IREG-NT-20W-NW	Power: 20W, Neutral white:4000K, 1500 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array		φ198×H122mm
IREG-NT-20W-WW	Power: 20W, Warm white:3000K, 1400 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array		φ198×H122mm

		<h2>30 Watt</h2>			
IREG-NT-30W-PW	Power: 30W, Day white: 5600K, 2400 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	
IREG-NT-30W-NW	Power: 30W, Neutral white:4000K, 2250 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	
IREG-NT-30W-WW	Power: 30W, Warm white:3000K, 2100 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	
		<h2>40 Watt</h2>			
IREG-NT-40W-PW	Power: 40W, Day white: 5600K, 3200 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	
IREG-NT-40W-NW	Power: 40W, Neutral white:4000K, 3000 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	
IREG-NT-40W-WW	Power: 40W, Warm white:3000K, 2800 lumen, size: 5" beam angle: 25/60, AC90-260V, Bridgelux Array			φ198xH122mm	




60Watt

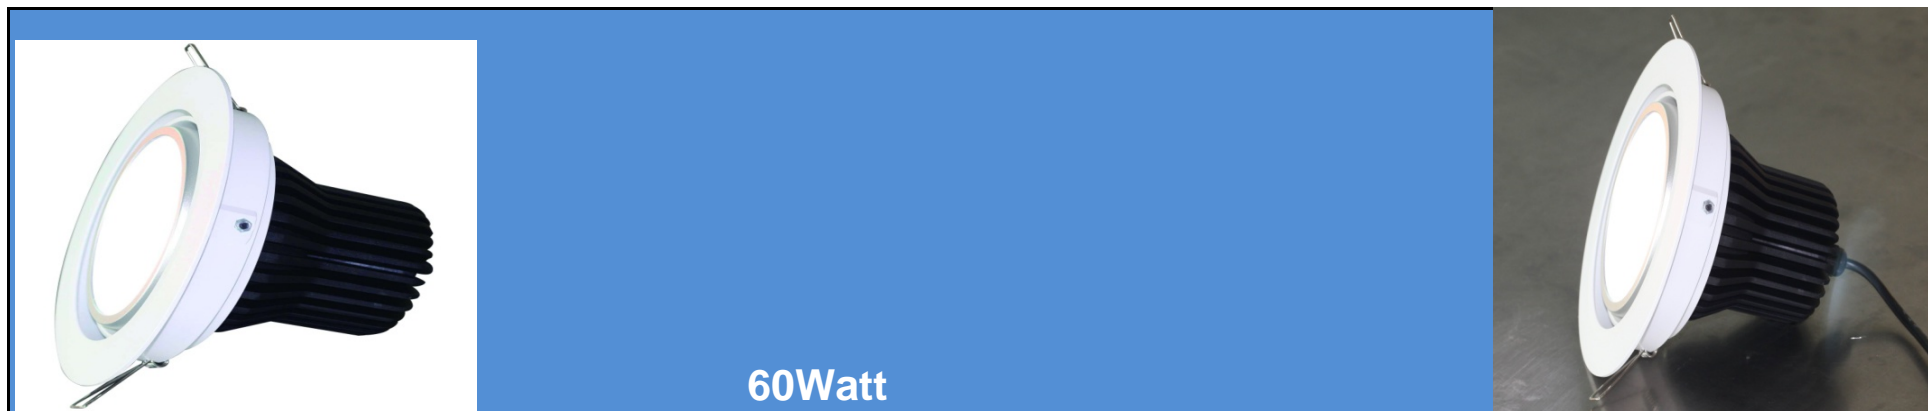IREG-NT-60W-WW-1	Power: 60W, Warm white:3000K, 4200 lumen, size: 6" beam angle: 25/60, AC90-260V, Bridgelux Array	∅198xH122mm
IREG-NT-60W-NW-2	Power: 60W, neutral white:3500K, 4500 lumen, size: 6" beam angle: 25/60, AC90-260V, Bridgelux Arra	∅198xH122mm



40W

IREG-T-40W-PW	Power: 40W, Day white: 5000-5500K, 2800 lumen, size: 6" beam angle: 80, 1750mA, Epistar LED	∅198xH122mm
IREG-T-40W-NW	Power: 40W, Neutral white:4000-4500K, 2500 lumen, size: 6" beam angle: 80, 1750mA, Epistar LED	∅198xH122mm
IREG-T-40W-WW	Power: 40W, Warm white:2700-3500K, 2300 lumen, size: 6" beam angle: 80, 1750mA, Episatr LED	∅198xH122mm

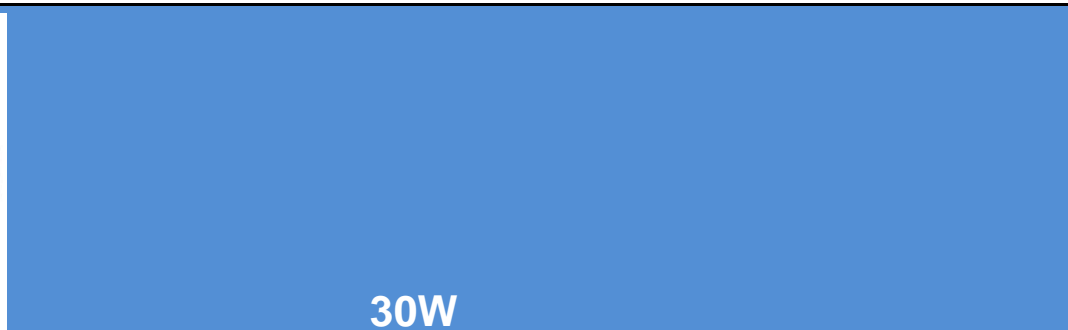





30W

IREG-T-30W-PW	Power:30W, Day white: 5000-5500K, 2300 lumen, size: 6" beam angle: 80, 1750mA, Bridgelux Array	∅198xH122mm
IREG-T-30W-NW	Power:30W, Neutral white:4000-4500K, 2000 lumen, size: 6" beam angle: 80, 1750mA, Bridgelux Array	∅198xH122mm
IREG-T-30W-WW	Power:30W, Warm white:2700-3500K, 1800 lumen, size: 6" beam angle: 80, 1750mA, Bridgelux Array	∅198xH122mm



20W

IREG-T-20W-PW	Power:20W, Day white: 5600K, 1800 lumen, size: 6" beam angle: 80, 1200mA, Bridgelux Array	∅198xH122mm
IREG-T-20W-NW	Power:20W, Neutral white:4000K, 1530 lumen, size: 6" beam angle: 80, 1050mA, Bridgelux Array	∅198xH122mm
IREG-T-20W-WW	Power:20W, Warm white:3000K, 1320 lumen, size: 6" beam angle: 80, 1200mA, Bridgelux Array	∅198xH122mm

	12W AR111 G53 12V		
IREG-AR111-12-12W-PW	Power: 12W, kaltweiß 4000K-656 lm, beam angle: 15+30 , 12VAC/DC, 450mA, EDISON LED		∅110xH63mm
IREG-AR111-12-12W-WW	Power: 12W, warmweiß 3700-3000K-656 lm, beam angle: 15+30 , 12VAC/DC, 450mA, EDISON LED		∅110xH63mm
	15W AR111 GU10 230V		
IREG-AR111-230-15W-WW	Power:15W, warm white: 2700-3000K 656 lumen, beam angle: 15+30, 12VAC/DC, 450mA, EDISON LED		∅110x93mm
IREG-AR111-230-15W-PW	Power:15W, kaltweiß, 4000K 649 lumen, beam angle: 15+30, 100-240VAC, EDISON LED		∅110x93mm
15W AR111 GU10 in 230V dimmbar			
IREG-AR111-230-15W-WWD	Power:15W, warm white: 2700-3000K 540-590 lumen, beam angle: 15+30, 12VAC/DC, 450mA, EDISON		∅110x93mm
IREG-AR111-230-15W-PWD	Power:15W, kaltweiß, 4000K 650-705 lumen, beam angle: 15+30, 100-240VAC, EDISON LED		∅110x93mm



LED Track Spotlight mit weißem, schwarzem und silbernem Gehäuse

IREG-SPOT-15W-PW	Power:15W, Day white: 5600K, 1200 lumen, 1200mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH255mm
IREG-SPOT-15W-NW	Power:15W, neutral white: 4000K, 1100 lumen, 1200mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH255mm
IREG-SPOT-15W-WW	Power:15W, warm white: 3000K, 1000 lumen, 1200mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH255mm
IREG-SPOT-20W-PW	Power:20W, Day white: 5600K,1350 lumen, 1400mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH210mm
IREG-SPOT-20W-NW	Power:20W, neutral white: 4000K, 1250 lumen, 1400mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH210mm
IREG-SPOT-20W-WW	Power:20W, warm white: 3000K, 1150 lumen, 1400mA, beam angle: 60/25 deg, Bridgelux Array	∅88xH210mm
IREG-SPOT-25W-PW	Power:25W, day white: 5600K, 2000 lumen, 1750mA, beam angle: 25 degree, Bridgelux Array	102*220MM
IREG-SPOT-25W-NW	Power:25W, neutral white: 4000K, 1900 lumen, 1400mA, beam angle: 25 degree, Bridgelux Array	102*220MM
IREG-SPOT-25W-WW	Power:25W, warm white: 3000K, 1800 lumen, 1400mA, beam angle: 25 degree, Bridgelux Array	102*220MM



1x3W-1x1W



IREG-DL421X1WA4W	Power: 1x1W	warmwhite 3000K	350 mAh	45 degree	EDISON LED	
IREG-T-3W-PW	Power: 3W, Day white: 5000-5500K, 150-180 lumen, 350mA, angle:10/30/45/60, CREE LED					φ50xH38mm
IREG-T-3W-WW	Power: 3W, Warm white: 2700-3500K, 120-150 lumen, 350mA, angle:10/30/45/60, CREE LED					φ50xH38mm




3X1W & 3X3W


IREG-T-3X1W-PW	3X1W, Day white: 5000-5500K, 260-300lumen, AC90-260V, 350mA, angle:10/30/45/60, CREE LED					φ77xH43mm
IREG-T-3X1W-WW	3X1W, Warm white: 2700-3500K, 230-260lumen, AC90-260V, 350mA, angle:10/30/45/60, CREE LED					φ77xH43mm
IREG-T-3X3W-PW	3X3W, Day white: 5000-5500K, 430-500lumen, AC90-260V, 700mA, angle:10/30/45/60, CREE LED					φ77xH43mm
IREG-T-3X3W-WW	3X3W, Warm white: 2800-3500K, 360-430lumen, AC90-260V, 700mA, angle:10/30/45/60, CREE LED					φ77xH43mm

		<p>4W</p>
IREG-T-4W-PW-A	Power:4W, Day white: 5000-5500K, 430 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ70*70*H50mm
IREG-T-4W-WW-A	Power:4W, Warm white: 2800-3500K, 320 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ70*70*H50mm
IREG-T-4W-PW-B	Power:4W, Day white: 5000-5500K, 370 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ70*70*H50mm
IREG-T-4W-WW-B	Power:4W, Warm white: 2800-3500K, 280 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ70*70*H50mm
		<p>5W</p>
IREG-T-5W-PW	Power:5W, Day white: 5000-5500K, 485-500 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ76.5xH50mm
IREG-T-5W-WW	Power:5W, Warm white: 2800-3500K, 355-370 lumen, 350mA, beam angle: 50/80/100, CREE LED	φ76.5xH50mm

	7W	
IREG-T-7W-PW	7W, Day white: 5000-5500K, 550-580 lumen, 350mA, beam angle: 38 degree, CREE LED	φ90×H66.7mm
IREG-T-7W-WW	7W, Warm white: 2800-3500K, 400-430 lumen, 350mA, beam angle: 38 degree, CREE LED	φ90×H66.7mm
	7X3W	
IREG-T-7X3W-PW	20W, Day white: 5000-5500K, 1000-1100 lumen, 700mA, beam angle: 25/30/45/60, CREE LED	φ119×H87mm
IREG-T-7X3W-WW	20W, Warm white: 2800-3500K, 900-950 lumen, 700mA, beam angle: 25/30/45/60, CREE LED	φ119×H87mm
	8X3W	

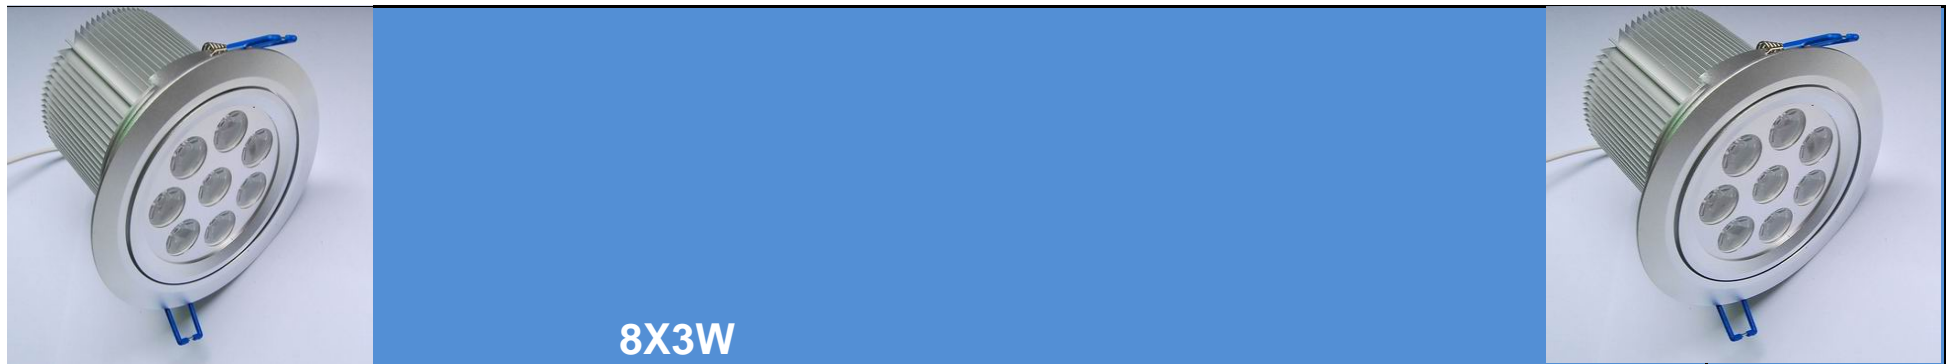

IREG-T-8X3W-PW	25W, Day white: 5000-5500K, 1100-1150 lumen, 700mA, beam angle: 15/25/30/45/60, CREE LED	∅120xH100mm
IREG-T-8X3W-WW	25W, Warm white: 2800-3500K, 1000-1050 lumen, 700mA, beam angle: 15/25/30/45/60, CREE LED	∅120xH100mm

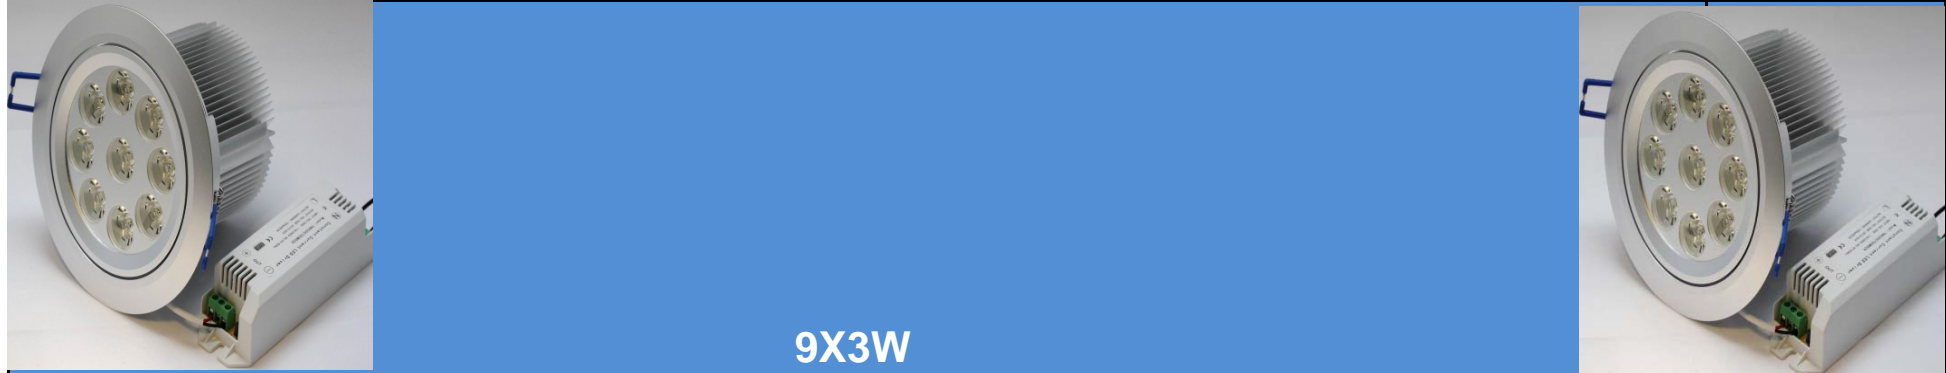

IREG-T-9X3W-PW	27W, Day white: 5000-5500K, 1200-1250 lumen, 700mA, beam angle: 15/25/30/45/60, CREE LED	∅120xH100mm
IREG-T-9X3W-WW	27W, Warm white: 2800-3500K, 1100-1150 lumen, 700mA, beam angle: 15/25/30/45/60, CREE LED	∅120xH100mm